

DS-425

Weighing scale



**High precision weighing scale
with user-friendly features,
designed for a variety of
applications**



Accurate, fast, functional and easy to use




Check weighing with filling function



Counting function



Selectable weight units (g, kg, oz or lb.)

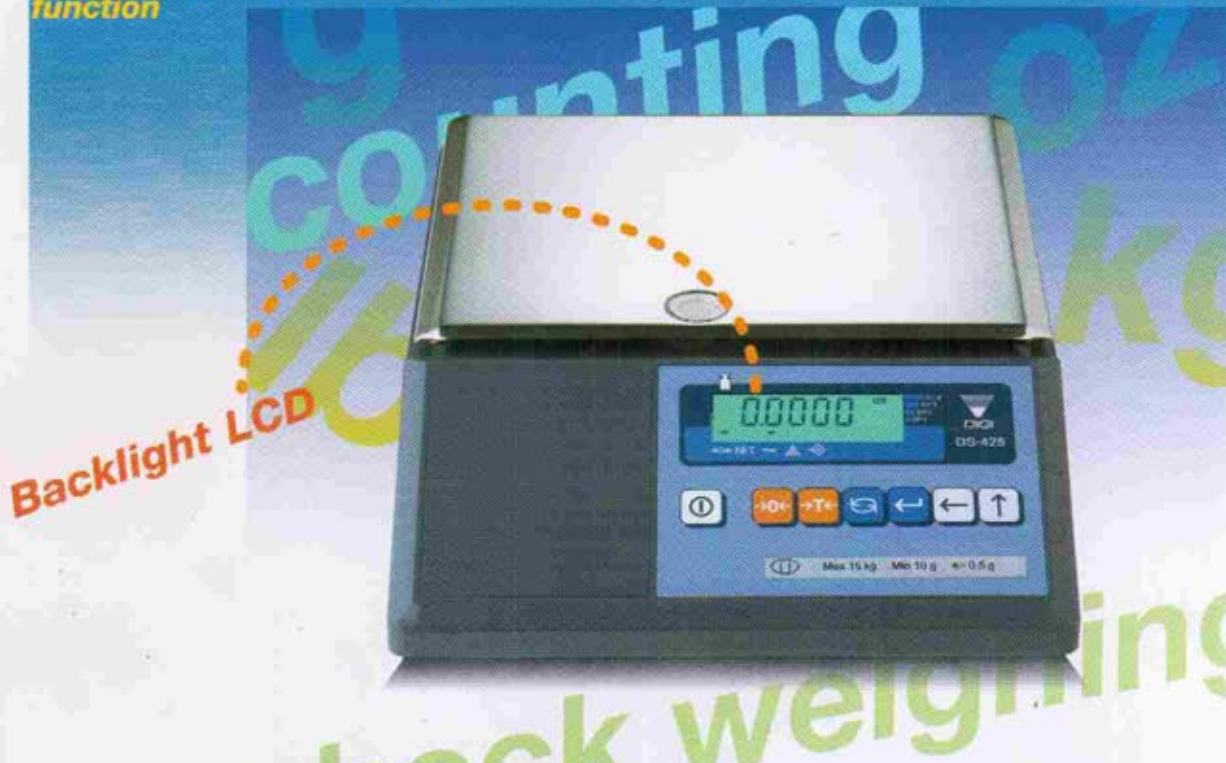

- **High display resolution: 1/30,000, resolution to 0.01g**
- **Standard RS-232C I/F** • **Digital tare subtraction**

Specifications

Capacity and resolution

Capacity	Resolution	Tare range	Platter size
Max 300g	e=0.01g	T=-150.00g	105 × 160mm
Max 3kg	e=0.1g	T=-1500.0g	205 × 250mm
Max 15kg	e=0.5g	T=-7500.0g	205 × 250mm

Dimensions: 256(W) × 321(L) × 80(H) mm/
10.08(W) × 12.64(L) × 3.15(H) inch

Internal resolution: 1/300,000
 Display resolution: 1/30,000
 Weight sensor: Load cell
 Weight display: 5 digits
 Power source: AC adapter (18VDC, 120mA)
 Power consumption: 2 W
 Operating temperature: 5°C to 35°C / 41°F to 95°F
 Operating humidity: 85%RH Max. (Non-condensing)
 Net weight: 3.5 kg / 7.71 lb
 Standard RS-232C I/F with Din 8 pin connector

** Specifications are subject to change without notice.*

Teraoka Seiko Co., Ltd.

13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580 Japan
TEL: +81-3-3752-2131 FAX: +81-3-3752-2801
http://teraoka.digi.co.jp/index.nsf
e-mail: info@hq.digi.co.jp